

10/ July. Spec.
N.E.
ع. زليلي
9-13-02
RECEIVED
JUL 12 2002
TECHNOLOGY CENTER 2800



[NAME OF DOCUMENT] Specification

[TITLE OF THE INVENTION]

Porous Polymer Particle, Alkali-Resistant Anion
Exchanger, Producing Method Thereof, Column for Ion
Chromatography, and Method for Measuring Anions

[DETAILED DESCRIPTION OF THE INVENTION]

[0001]

[Technical Field to Which the Invention Belongs]

The present invention relates to a porous polymer particle, an alkali-resistant anion exchanger, a producing method thereof, a packing material for a suppressor-system ion chromatography column, comprising the anion exchanger, a column for a suppressor-system ion chromatography, and a method for measuring anions using the column.

More specifically, the present invention relates to a porous polymer particle capable of satisfactorily separating and analyzing inorganic ions such as fluoride ion, chloride ion, nitrite ion, bromide ion, nitrate ion, sulfate ion and phosphate ion, within a short period of time under an isocratic condition of using a hydroxide-type eluent at a constant concentration; an alkali-resistant anion exchanger for suppressor-system ion chromatography; a producing method thereof; a column for suppressor-system ion chromatography using the anion exchanger; a method for measuring anions using the column; and a measuring method

10021272-121901

capable of satisfactorily separating and analyzing halogen oxide ions such as chlorite ion, chlorate ion and bromate ion, simultaneously with other inorganic ions (e.g., fluoride ion, chloride ion, nitrite ion, bromide ion, nitrate ion, sulfate ion, phosphate ion) within a short period of time.

[0002]

[Background Art]

In the inspection or analysis of water quality or in the analysis of food, the matter of importance is the analysis of seven kinds of ions, that is, fluoride ion (F^-), chloride ion (Cl^-), nitrite ion (NO_2^-), bromide ion (Br^-), nitrate ion (NO_3^-), sulfate ion (SO_4^{2-}) and phosphate ion (PO_4^{3-}). These ions are called "seven kinds of standard inorganic ions". In recent years, ion chromatography is being used as efficient and high-precision/high-sensitive means for analyzing inorganic anions including these seven kinds of standard inorganic ions.

[0003]

In the ion chromatography, a sample containing an ion species is injected into an ion exchange column while feeding an eluent into the column and the ions (kind, amount) separated and eluted from the column with a time gap due to the difference in the retention time are detected by a high-sensitivity detector such as electrical

conductivity detector. The ion chromatography includes "a suppressor system" using a suppressor and "a non-suppressor system" using no suppressor. The suppressor is an apparatus of displacing a cation in a liquid by a hydrogen ion. As shown in Fig. 1, the suppressor is connected between the separation column and the detector and at the time of detecting ions by an electrical conductivity detector, undertakes an action to decrease the electrical conductivity of the background and thereby increase the measurement sensitivity.

[0004]

More specifically, in "the suppressor system", a mixed solution of sodium carbonate and sodium hydrogencarbonate, a boric acid buffer, an aqueous sodium hydroxide solution, an aqueous potassium hydroxide solution or the like is passed through as the eluent to separate the sample ion in the separation column and thereafter the ion separated is detected by an electrical conductivity detector through a suppressor. By designating the electrical conductivity of the eluent itself as the electrical conductivity of the background, the electrical conductivity measured by the detector is recognized as a signal superposed by the contribution of the ion species in the sample. The suppressor converts a salt or a base in the eluent to an acid having a lower degree of dissociation, whereby the

electrical conductivity of the background is reduced and the measurement sensitivity of signals by the ion species in the sample is improved.

The suppressor system requires an exclusive apparatus as compared with the non-suppressor system but since high sensitivity can be attained, this system is indispensable for the control of pure water, chemicals and the like used in the semiconductor art.

[0005]

The anion exchanger heretofore predominantly used for the suppressor-system column includes a pellicular-type ion exchanger obtained by sulfonating a styrene/divinylbenzene-type substrate and coating an anion exchangeable latex thereon, and a porous chemical bond-type ion exchanger obtained by introducing an anion exchange group into a polyvinyl alcohol substrate.

[0006]

The pellicular-type ion exchanger restricts the migration of ions only to the surface of the packing and does not allow their entering into pores, therefore, this ion exchanger is advantageous in that (1) the diffusion is almost prevented from occurring and (2) the ion does not interfere with the substrate. However, on the other hand, this ion exchanger is disadvantageous in that the usable surface area of the packing is limited in view of the

structure and therefore, the column efficiency is limited. For elevating the column efficiency of the pellicular-type ion exchanger, it is necessary to increase the column length or to reduce the particle size of the packing. However, the column used at present already has a large length of 250 mm and more increase of the column length is not practical. Although reduction in the particle size may be thought, even a packing having a particle size of about 5 μ m which is commonly used in the high-performance liquid chromatography, is very difficult to manufacture due to limitation in view of the structure. Therefore, the pellicular-type ion exchanger cannot satisfy the requirement to have higher performance than the current theoretical plate number of 6,000 plates/column.

[0007]

On the other hand, the porous chemical bond-type ion exchanger is excellent in the effective surface area of the packing because the ion migrates into pores to undertake the ion exchange, therefore, this ion exchanger has a possibility of achieving higher performance than the pellicular-type ion exchanger using a styrene/divinylbenzene-type copolymer substrate. The present inventors have proposed a porous chemical bond-type ion exchanger originated in a polyvinyl alcohol substrate having a sufficiently high alkali resistance even under the alkali

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

conditions in the analysis of anions by the suppressor system, and a production method thereof (see, JP-A-2001-40032, the term "JP-A" as used herein means an "unexamined published Japanese patent application"). In the analysis using a column packed with this anion exchanger, excellent properties can be advantageously obtained, for example, a higher theoretical plate number can be obtained, and the position where a carbonate dip (in the analysis of anions using ion chromatography, carbon dioxide gas contained in the sample is also detected as carbonate ion; the carbonate ion peak is here called a carbonate dip) appears can be controlled.

[0008]

In the analysis of anions by ion chromatography, it is usually ideal to separate seven kinds of standard inorganic anions in good balance within an analysis time as short as possible. However, fluoride ion is difficult to hold in the anion exchanger of the separating column and swiftly passes through the column. As the result, a signal peak of fluoride ion and a water dip (a negative peak caused by the dilution of eluent when the sample is injected) cannot be sufficiently separated and the precision of determination is readily impaired.

It may be thought to use an eluent having weak elution strength so as to elevate the retention of fluoride ion,

however, in this case, the time necessary for the elution of divalent or greater valence anions (sulfate ion and phosphate ion) becomes very long and this incurs redundancy in the analysis time. This problem is particularly serious when the eluent is alkaline. To overcome this problem, the analysis conditions must be designed so that fluoride ion and divalent or greater valence anions can be simultaneously analyzed.

[0009]

Accordingly, a method for overcoming the above-described problems by optimizing the eluent composition is being studied. For example, in the non-suppressor system, a method of adding a boric acid to a weakly acidic moving phase, selectively reacting the boric acid and a fluoride ion to produce an anionic compound and thereby elevating the retention is disclosed (see, JP-B-7-37972, the term "JP-B" as used herein means an "examined Japanese patent publication"). In the suppressor system, it is known that when the eluent used is a mixed solution of sodium carbonate and sodium hydrogencarbonate, the retention of fluoride ion can be elevated by changing the compositional ratio therebetween. Furthermore, in the suppressor system, a method of adding a salt compound of boric acid to the eluent is disclosed (see, JP-A-2000-180429). As such, when the eluent can be composed of a plurality of components,

the problems can be overcome by changing the composition of the eluent.

[0010]

However, a hydroxide-type eluent used as the eluent for the suppressor system, such as aqueous sodium hydroxide solution and aqueous potassium hydroxide solution, usually comprises a single component and therefore, the problem cannot be overcome by the eluent. Accordingly, in the measurement by the suppressor system using an alkaline eluent, special means must be used for achieving both the improvement in retention of fluoride ion and the reduction in elution time of divalent or greater valence anions (particularly phosphate ion out of the seven kinds of standard inorganic anions).

The methods heretofore employed are classified into two groups. One is a gradient analysis method of using an eluent graded in the concentration, and the other is a method of setting the ion exchanger packed into the column to a large ion exchange capacity and using an eluent in a high concentration of about 40 mM.

[0011]

The first method has a problem in that at least two kinds of solutions different in the concentration must be prepared so as to impart a concentration gradient, an apparatus and an operation for absorbing and mixing these

solutions using two pumps are required, and a stabilization time for returning the eluent to the original concentration every each measurement is necessary. On the other hand, the second method has a problem in that since the eluent concentration is high, a high voltage must be applied for electrodialysis in the suppressor equipment using a continuous regeneration-type ion exchange membrane, which is being widely used at present, and this shortens the lifetime of the suppressor.

[0012]

At the time of analyzing tap water by the suppressor system using a hydroxide-type eluent, it is necessary not only to attain both the improvement in the retention of the fluoride ion and the reduction in the elution time of phosphate ion but also to attain satisfactory separation of chloride ion and nitrite ion at the same time. This is because in the analysis of tap water, several ppb of nitrite ion must be analyzed in the presence of tens of ppm of chloride ion. In conventional columns used for a hydroxide-type eluent, the separation of chloride ion and nitrite ion is not satisfied and even if satisfied, since carbonate ion elutes therebetween, the trace nitrite ion cannot be analyzed at the same time.

[0013]

The present inventors have previously proposed a

production method for anion exchangers which are obtained by introducing a tertiary heterocyclic amine into an acrylate- or methacrylate-type polymer through a spacer molecule, and a column packed with this anion exchanger (JP-A-2000-221179). However, the matters proposed are a column for a non-suppressor system ion chromatography which uses an acidic eluent, and a method for producing a packing material for the column, and this is not used for measuring anions as a column for suppressor-system ion chromatography using an alkaline eluent.

Recently, as the facility for advanced water purification increases, the analysis of halogen oxides such as bromate ion, chlorite ion and chlorate ion is keenly demanded in addition to the analysis of inorganic anions conventionally performed in the analysis of water supply.

[0014]

For use in the suppressor-system column for the analysis of these halogen oxide ions, IonPac AS9-HC, IonPac AS9-SC and IonPac AS12A are already available from Dionex Corporation. However, in these column packing materials, a styrene/divinylbenzene-type copolymer is used as a substrate and a quaternary alkylamine is introduced as an anion exchange group.

[0015]

On the other hand, conventionally known suppressor-

10021272-121901

system columns packed with a porous chemical bond-type ion exchanger comprising a polyvinyl alcohol-type substrate having introduced therein an anion exchange group cannot separate and analyze bromide ion, chlorite ion and chlorate ion simultaneously with seven kinds of standard inorganic anions, namely, fluoride ion, chloride ion, nitrite ion, bromide ion, nitrate ion, sulfate ion and phosphate ion. In the present invention, the separation degree R as an index for separation is determined according to the following formula. Heretofore, the separation degree R of chlorite ion and bromate ion, and the separation degree R of chlorate ion and bromide ion cannot be made 1.5 or more at the same time (in general, the separation degree R is preferably 1.5 or more).

[0016]

[Eq. 1]

$$R=2 \times (t_2 - t_1) / (w_1 + w_2)$$

wherein w_1 and w_2 represent respective peak widths, and t_1 and t_2 represent respective retention times.

[0017]

[Problems to be Solved by the Invention]

The present invention has been made under these circumstances and the object of the present invention is to provide an anion exchanger for ion chromatography column, wherein in a suppressor-system ion chromatography using a

hydroxide-type eluent, an eluent of low concentration (for example, 20 mM or less) can be used, the gradient analysis cannot be relied on (that is, an isocratic condition at a constant concentration can be used), the elution time of phosphate ion can be shortened to the time period on the order of a dozen of minutes to tens of minutes, fluoride ion which is difficult to hold can be satisfactorily separated from a water dip, and at the same time, chloride ion and nitrite ion can be satisfactorily separated. The object of the present invention includes providing a production method of the anion exchanger, a packing material for a suppressor-system ion chromatography column using the anion exchanger, a column for ion chromatography, a method for inexpensively and precisely measuring anions using the column, and a measuring method capable of separating and analyzing halogen oxide ions such as bromate ion, chlorite ion and chlorate ion simultaneously with seven kinds of standard inorganic anions, that is, fluoride ion, chloride ion, nitrite ion, bromide ion, nitrate ion, sulfate ion and phosphate ion.

[0018]

[Means to Solve the Problems]

As a result of extensive investigations to attain the above-described objects, the present inventors have found that by using a column packed with an alkali-resistant

anion exchanger comprising a porous polymer having a structure such that a nitrogen-containing heterocyclic group containing a quaternary ammonium structure is bonded to the alkali-resistant polymer substrate through a spacer, seven kinds of standard inorganic anions can be satisfactorily separated without relying on the gradient analysis in the suppressor-system ion chromatography using a hydroxide-type eluent and also that bromate ion, chlorite ion and chlorate ion can be separated and analyzed simultaneously with seven kinds of standard inorganic anions, namely, fluoride ion, chloride ion, nitrite ion, bromide ion, nitrate ion, sulfate ion and phosphate ion. The present invention has been accomplished based on these findings.

[0019]

That is, the present invention relates to a porous polymer particle, an alkali-resistant anion exchanger, a producing method thereof, a packing material for a suppressor-system ion chromatography column comprising the anion exchanger, a column for suppressor-system ion chromatography, and a method for measuring anions using the column.

[0020]

1. A porous polymer particle comprising an alkali-resistant polymer substrate having bonded thereto through a

spacer a nitrogen-containing heterocyclic group containing a quaternary ammonium structure.

2. The porous polymer particle as described in 1 above, wherein the nitrogen-containing heterocyclic group containing a quaternary ammonium structure is derived from an aromatic or non-aromatic heterocyclic compound.

3. The porous polymer particle as described in 2 above, wherein the nitrogen-containing heterocyclic compound is a compound selected from the group consisting of a pyridine compound represented by formula (1):

[Chem. 1]



(wherein R represents an alkyl or alkoxy group having from 1 to 5 carbon atoms, which may be substituted by a hydroxyl group or a halogen atom, or a halogen atom, m represents an integer of 0 to 5, and when m is 2 or more, the plurality of R may be the same or different), a 1-alkylpyrrolidine compound represented by formula (2):


[Chem. 2]



(wherein R represents an alkyl group having from 1 to 5

carbon atoms, which may be substituted by a hydroxyl group or a halogen atom, R^1 represents a hydroxyl group or an alkyl or alkoxy group having from 1 to 5 carbon atoms, which may be substituted by a hydroxyl group, and n represents an integer of 0 to 2), 1-alkylpiperidine represented by formula (3):


[Chem. 3]



(3)

(wherein R represents an alkyl group having from 1 to 5 carbon atoms, which may be substituted by a hydroxyl group or a halogen atom, R^1 represents a hydroxyl group or an alkyl or alkoxy group having from 1 to 5 carbon atoms, which may be substituted by a hydroxyl group, and n represents an integer of 0 to 2), and 1,4-dialkylpiperazine represented by formula (4):

[Chem. 4]



(4)

(wherein R^2 and R^3 may be the same or different and each independently represents a hydrogen atom or an alkyl group having from 1 to 5 carbon atoms, which may be substituted by a hydroxyl group or a halogen atom, provided that R^2 and

R' are not a hydrogen atom at the same time).

4. The porous polymer particle as described in 3 above, wherein the nitrogen-containing heterocyclic compound is pyridine, 2-methylpyridine, 3-methylpyridine, 4-methylpyridine, 2-hydroxy-4-methylpyridine, 2-hydroxy-6-methylpyridine, 2-hydroxypyridine, 3-hydroxypyridine, 4-hydroxypyridine, 1-methylpyrrolidine, 1-ethylpyrrolidine, 1-methylpiperidine, 1-ethylpiperidine, 1-(2-hydroxyethyl)piperidine, 1-(hydroxymethyl)piperidine, 1-(2-hydroxyethylpyrrolidine, 2-(2-hydroxyethyl)-1-methylpyrrolidine, 3-hydroxy-1-methylpiperidine, 4-hydroxy-1-methylpiperidine, 4-chloro-1-methylpiperidine, 1-(2-chloroethyl)piperidine, 1-(2-chloroethyl)pyrrolidine, 1-methylpiperazine, 1-ethylpiperazine or 1,4-dimethylpiperazine.

5. The porous polymer particle as described in any one of 1 to 4 above, wherein the substrate of the porous polymer particle is selected from a polyvinyl alcohol-type copolymer and a styrene/divinylbenzene-type copolymer, the spacer molecule connecting the substrate and the anion exchange group is a compound containing a glycidyl group, and the polymer is bonded to the spacer molecule through a bond incapable of cleaving under alkali conditions.

6. The porous polymer particle as described in any one of 1 to 5 above, wherein the average particle size is 1

to 30 μm .

7. The porous polymer particle as described in any one of 1 to 6 above, wherein the average pore size is 50 to 300 \AA .

8. An alkali-resistant anion exchanger comprising porous polymer particles described in any one of 1 to 7 above.

9. A method for producing an alkali-resistant anion exchanger, comprising bonding a spacer molecule containing a glycidyl group to an alkali-resistant polymer porous particle selected from a polyvinyl alcohol-type copolymer and a styrene/divinylbenzene-type copolymer through a bond incapable of cleaving under alkali conditions, and reacting the glycidyl group with a nitrogen-containing heterocyclic group to introduce an anion exchange group.

10. The method for producing an alkali-resistant anion exchanger as described in 9 above, wherein the nitrogen-containing heterocyclic compound is selected from the nitrogen-containing heterocyclic groups described in 2 or 3 above.

11. The method for producing an alkali-resistant anion exchanger as described in 10 above, wherein a compound containing two or more glycidyl groups within the molecule is reacted with a polyvinyl alcohol-type copolymer obtained by saponifying and thereby partially converting a

10021272-121001

copolymer of a carboxylic acid vinyl ester and an isocyanurate-type crosslinking monomer into a hydroxyl group, to introduce a glycidyl group-containing group such that the mass thereof after the reaction becomes from 103 to 140 assuming that the mass of the polyvinyl alcohol-type copolymer is 100, and the reaction product is reacted with a nitrogen-containing heterocyclic group.

12. The method for producing an alkali-resistant anion exchanger as described in 11 above, wherein the saponification of the polyvinyl alcohol-type polymer is performed until from 0.5 to 5 meq/g of hydroxyl group is produced in the polymer.

13. A packing material for a suppressor-system ion chromatography column, comprising the anion exchanger described in 8 above.

14. A column for suppressor-system ion chromatography, which is packed with the alkali-resistant anion exchanger described in 8 above.

15. A method for measuring anions by suppressor-system ion chromatography, comprising using the column described in 14 above in combination with an alkaline eluent.

16. The method for measuring anions as described in 15 above, wherein the alkaline eluent is a hydroxide eluent.

17. The method for measuring anions as described in

16 above, wherein the hydroxide-type eluent as the alkaline eluent is used under an isocratic condition at a concentration of 20 mM or less.

18. The method for measuring anions as described in any one of 15 to 17 above, which is used for the measurement of halogen oxide ion.

19. A method for measuring anions by non-suppressor system ion chromatography, comprising using a column packed with the anion exchanger described in 8 above for the measurement of halogen oxide ion.

20. The method for measuring anions as described in 18 or 19 above, wherein the halogen oxide ion is chlorite ion, chlorate ion and/or bromate ion.

21. The method for measuring anions as described in any one of 16 to 20 above, wherein the halogen oxide ion is measured simultaneously with anions selected from the group consisting of fluoride ion, chloride ion, nitrite ion, bromide ion, nitrate ion, sulfate ion and phosphate ion.

22. The method for measuring anions as described in any one of 18 to 21 above, wherein the separation degree of chlorite ion and bromate ion, and the separation degree of chlorate ion and bromide ion are 1.5 or more.

[0021]

[Mode for Carrying Out the Invention]

The present invention is described in detail below.

14
00
12
27
10
10
10
02
14


(A) Compound containing nitrogen-containing heterocyclic group

For the starting material of a nitrogen-containing heterocyclic group containing a quaternary ammonium structure, an aromatic or non-aromatic nitrogen-containing heterocyclic compound is used. Insofar as the obtained ion exchanger can function as an anion exchanger, the compound may further have a substituent on the carbon constituting the ring.

Examples of the aromatic nitrogen-containing heterocyclic compound include a (substituted) pyridine compound represented by the following formula (1):

[0022]

[Chem. 5]



(1)


wherein R represents an alkyl or alkoxy group having from 1 to 5 carbon atoms, which may be substituted by a hydroxyl group or a halogen atom, or a halogen atom, m represents an integer of 0 to 5, and when m is 2 or more, the plurality of R may be the same or different.

Examples of the non-aromatic nitrogen-containing heterocyclic compound include a 1-(substituted)alkylpyrrolidine compound represented by the following formula

(2), a 1-(substituted)alkylpiperidine compound represented by formula (3) and a 1,4-di(substituted)alkylpiperazine compound represented by formula (4).

[0023]

[Chem. 6]




(2)

[0024]

wherein R represents an alkyl group having from 1 to 5 carbon atoms, which may be substituted by a hydroxyl group or a halogen atom, R¹ represents a hydroxyl group or an alkyl or alkoxy group having from 1 to 5 carbon atoms, which may be substituted by a hydroxyl group, and n represents an integer of 0 to 2;

[0025]

[Chem. 7]



(3)

[0026]

wherein R represents an alkyl group having from 1 to 5 carbon atoms, which may be substituted by a hydroxyl group or a halogen atom, R¹ represents a hydroxyl group or an

alkyl or alkoxy group having from 1 to 5 carbon atoms, which may be substituted by a hydroxyl group, and p represents an integer of 0 to 2;

[Chem. 8]



[0027]


wherein R² and R³ may be the same or different and each represents a hydrogen atom or an alkyl group having from 1 to 5 carbon atoms, which may be substituted by a hydroxyl group or a halogen atom, provided that R² and R³ are not a hydrogen atom at the same time).

[0028]

Specific examples of the aromatic nitrogen-containing heterocyclic compound include pyridine, 2-methylpyridine, 3-methylpyridine, 4-methylpyridine, 2-hydroxy-4-methylpyridine, 2-hydroxy-6-methylpyridine, 2-hydroxypyridine, 3-hydroxypyridine and 4-hydroxypyridine.

The nitrogen-containing heterocyclic ring of the non-aromatic nitrogen-containing heterocyclic compound can contain organochemically allowable oxygen or sulfur in place of carbon. Examples thereof include a compound represented by formula (5):


[Chem. 9]



(5)

a compound represented by formula (6):


[Chem. 10]



(6)

a compound represented by formula (7):


[Chem. 11]



(7)

and a compound represented by formula (8):

[Chem. 11]



(8)

(wherein R, R¹, n and p have the same meanings as above).

[0029]

Specific examples of the non-aromatic nitrogen-containing heterocyclic compound include 1-

methypyrrolidine, 1-ethylpyrrolidine, 1-methylpiperidine, 1-ethylpiperidine, 1-(2-hydroxyethyl)piperidine, 1-(hydroxymethyl)piperidine, 1-(2-hydroxyethyl)pyrrolidine, 2-(2-hydroxyethyl)-1-methylpyrrolidine, 3-hydroxy-1-methylpiperidine, 4-hydroxy-1-methylpiperidine, 4-chloro-1-methylpiperidine, 1-(2-chloroethyl)piperidine, 1-(2-chloroethyl)pyrrolidine, 1-methylpiperazine, 1-ethylpiperazine, 1-methyl-2-(hydroxyethyl)morpholine and 1,4-dimethylpiperazine.

[0030]

(B) Anion exchanger and production method thereof

The amount of the anion exchange group introduced is preferably from 4 to 200 $\mu\text{eq/g}$, more preferably from 8 to 50 $\mu\text{eq/g}$.

The form of the packing material manufactured by introducing the ion exchange group includes an alkali-resistant porous chemical bond-type ion exchanger and a pellicular-type ion exchanger.

[0031]

(1) Porous chemical bond-type ion exchanger

In the porous chemical bond-type ion exchanger which is preferably used in the present invention, the above-described nitrogen-containing heterocyclic compound is bonded to an alkali-resistant polymer through a spacer to produce an ion exchange group.

10021272-121001

[0032]

A porous polymer used as a substrate of the porous chemical bond-type ion exchanger is not particularly limited insofar as the polymer has resistance against alkali. Examples of the polymer include a polyvinyl alcohol-type copolymer and a styrene/divinylbenzene-type copolymer.

A spacer molecule having a group capable of bonding to a tertiary heterocyclic amine compound is bonded to this alkali-resistant porous polymer and further, a tertiary heterocyclic amine compound is reacted therewith to produce an amine exchange group.

[0033]

The spacer molecule provides an intervention of multiple atoms, usually 3 to 20 atoms, between the substrate surface and the ion exchange group. The spacer molecule is bonded to the alkali-resistant porous polymer at one end and to the ion exchange group at the another end, as a result, this molecule acts as a spacer for elongating the distance between the substrate and the ion exchange group, and has a function of preventing the ion and the substrate from interfering with each other and also preventing diffusion of peaks.

The spacer molecule is preferably a compound containing a glycidyl group which bonds to a tertiary

heterocyclic amine compound. Specific examples thereof include epichlorohydrin, 1,4-butanediol diglycidyl ether, ethylene glycol diglycidyl ether and glycerol glycidyl ether.

[0034]


- (2) Production method of porous chemical bond-type ion exchanger.

The bond between the spacer molecule and the alkali-resistant porous polymer may be any insofar as the bond is not cleaved under the pH condition used for the analysis of anions.

The production method is not particularly limited, however, for example, the porous chemical bond-type ion exchanger can be produced by a method of incorporating an ester bond into an alkali-resistant porous polymer, saponifying and thereby converting it into a hydroxyl group, and reacting the polymer with a diglycidyl compound containing two or more diglycidyl groups as a spacer molecule within the same molecule. As one example, the case where 1-methylpiperidine is introduced into the hydroxyl group of the substrate through the spacer 1,4-butanediol diglycidyl ether is schematically shown below.

[0035]

[Chem. 13]

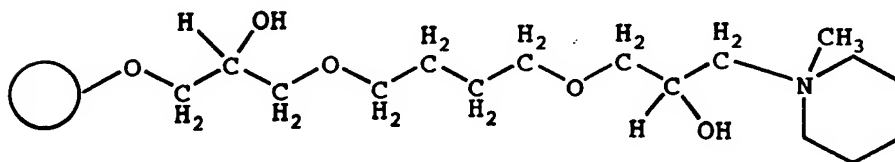

[0036]

1002-1272-121004

The production method is described in greater detail by referring to an alkali-resistant polyvinyl alcohol-type copolymer as an example. A copolymer of a carboxylic acid vinyl ester and a crosslinkable monomer having an isocyanurate ring are saponified and thereby the ester groups of the copolymer are partially converted into a hydroxyl group. By this conversion, the substrate is elevated in the hydrophilicity and prevented from the interference with ion. At the same time, the hydroxyl group works out to an active site necessary for the reaction with a spacer molecule. With this copolymer, a compound containing two or more glycidyl groups within the same molecule, such as 1,4-butanediol diglycidyl ether is reacted.

[0037]

For satisfactorily introducing the glycidyl group-containing group which is reacted with a tertiary heterocyclic amine, the saponification is preferably performed such that the hydroxyl group is present in an

1-
2-
3-
4-
5-
6-
7-
8-
9-
10-
11-
12-
13-
14-
15-
16-
17-
18-
19-
20-
21-
22-
23-
24-
25-
26-
27-
28-
29-
30-
31-
32-
33-
34-
35-
36-
37-
38-
39-
40-
41-
42-
43-
44-
45-
46-
47-
48-
49-
50-
51-
52-
53-
54-
55-
56-
57-
58-
59-
60-
61-
62-
63-
64-
65-
66-
67-
68-
69-
70-
71-
72-
73-
74-
75-
76-
77-
78-
79-
80-
81-
82-
83-
84-
85-
86-
87-
88-
89-
90-
91-
92-
93-
94-
95-
96-
97-
98-
99-
100-

amount of at least 0.5 meq/g to 5 meq/g, preferably from 1.0 to 3 meq/g. If the amount of the hydroxyl group is less than 0.5 meq/g, the glycidyl group-containing group cannot be introduced in a sufficiently large amount, whereas if it exceeds 5 meq/g, the substrate decreases in the strength and this disadvantageously makes it difficult to improve the performance of the column by reducing the particle size of the substrate.

[0038]

The amount of the hydroxyl group is determined by reacting a hydroxyl group with an acetic anhydride and measuring the amount of the acetic anhydride consumed or the change in the weight after the reaction. At this time, in the case where the functional group of the substrate also reacts, the functional group is protected and then, the amount of the hydroxyl group is determined by the above-described method. The amount of the hydroxyl group at the time of reacting 1 g of dry substrate with 1 mmol of acetic anhydride is defined as 1 mmol/g.

[0039]


The carboxylic acid vinyl ester which is preferably used in this method is a compound having one or more polymerizable carboxylic acid vinyl ester group. Examples thereof include vinyl acetate, vinyl propionate, vinyl butyrate, vinyl valerate and vinyl pivalate. These are used

individually or in combination of two or more thereof. Among these, preferred are vinyl acetate and vinyl propionate which are hydrophilic and facilitated in the polymerization and saponification.

[0040]

Suitable examples of the isocyanurate-type crosslinking monomer include cross-linking monomers having an isocyanurate ring represented by the following formula:

[Chem. 14]



[0041]

(wherein R^4 , R^5 and R^6 each independently represents $-\text{CH}_2\text{CH}=\text{CH}_2$, $-\text{CH}_2-\text{C}\equiv\text{CH}$ or $-\text{CH}_2-\text{C}(\text{CH}_3)=\text{CH}_2$). Among these, triallyl cyanurate where R^4 , R^5 and R^6 all are $-\text{CH}_2\text{CH}=\text{CH}_2$ is preferred as a crosslinking agent because of its good copolymerizability with vinyl acetate and high stability against the saponification.

[0042]

The increase in the mass after the glycidyl compound reaction is from 103 to 140 assuming that the mass of the polyvinyl alcohol-type copolymer is 100. If the increase in

the mass is less than 103, the resistance against alkali is not sufficiently high and this is not preferred, whereas if the increase in the mass exceeds 140, soft particles or occurrence of association among particles may disadvantageously result. The increase in the mass is preferably from 104 to 135, more preferably from 105 to 125.

[0043]

The anion exchanger obtained by the above-described method is a porous particle. The pore size of the porous particle is from 50 to 300 Å, preferably from 50 to 150 Å, more preferably from 50 to 100 Å. If the pore size is less than 50 Å, the glycidyl group-containing group cannot be introduced into the inside of pores and this is not preferred, whereas if it exceeds 300 Å, the strength of the particle disadvantageously decreases. The pore size is controlled by a method commonly used for the packing material used in high-performance liquid chromatography.

[0044]

The pore size may be determined by the reverse size exclusion method or BET (Brunauer-Emmett-Teller) method described in J. Chromatogr., 387, 65 (1987), however, in the present invention, unless otherwise indicated, the average pore size is determined according to the method described in Angw. Chem. Int. Ed. Engl., 17, 901-908 (1978).

[0045]

In the measurement, particles to be measured are filled in the column, the column is connected with an HPLC apparatus, THF is flown as an eluent, and the retention capacity is measured for a plurality of standard polystyrenes and benzenes having a molecular weight over a wide range. The results obtained are plotted on a graph where the molecular weight M (logarithmic scale is preferred because of easy viewing) and the retention capacity (mL) are graduated on the axis Y and the axis X , respectively. The curve drawn by smoothly connecting the thus-plotted points is called a calibration curve. From the calibration curve, exclusion limit points (V_1 , M_1) are determined by an ordinary method and using these points and the measuring point (V_2 , 78) of benzene, a straight line $X=(V_1+V_2)/2$ is drawn on the graph. On the coordinate Y , M_m at the node (called average pore point) between the straight line and the calibration curve is read and the value obtained is substituted to the following formula (X) equivalent to the empirical formula (11) described in the above-described publication, page 905, whereby the average pore size ϕ_m [Å] is calculated.

[Eq. 2]

$$\phi_m[\text{Å}] = 0.62 \times (M_m)^{0.59} \quad [X]$$

10021272-121001

[0046]

The "average pore point" is used and defined by the present inventors. The average pore point means a point when assuming that the entire pore volume is 100%, the integrated volume from the minimum volume (a size where benzene is just fitted) reaches 50%. The above-described equation is used for converting the standard polystyrene-equivalent molecular weight into the diameter of a pore for allowing just fitting thereof.

[0047]

(3) Pellicular-type ion exchanger

The pellicular-type ion exchanger is a particle obtained by coating the surface of a core particle with a latex having introduced therein an ion exchange group. Examples of the core particle include sulfonated polystyrene.

[0048]

The anion exchanger of the present invention suitably has a particle size of 1 to 30 μm , preferably from 2 to 20 μm , and in the case of porous chemical bond-type ion exchanger, more preferably from 2 to 10 μm . In the pellicular-type ion exchanger, the particle size of the resin is usually on the order of 5 to 15 μm . If the particle size of the anion exchanger exceeds 30 μm , the theoretical plate number of the column disadvantageously decreases,

whereas if the particle size is less than 1 μm , the column pressure excessively elevates and the packing becomes extremely difficult.

In the present invention, the particle size is measured by a Coulter counter.

[0049]

(C) Column for ion chromatography

The anion exchanger of the present invention is packed into a column for ion chromatography in accordance with a known packing method such as slurry method. The column according to the present invention has alkali resistance and is used as a high-sensitive column for suppressor-system ion chromatography.

[0050]

The column using the anion exchanger according to the present invention is stable against the eluent (e.g., a mixed solution of sodium carbonate and sodium hydrogencarbonate, a boric acid buffer, an aqueous sodium hydroxide solution, an aqueous potassium hydroxide solution) used in the suppressor-system ion chromatography. This column is useful for the use in combination with an alkaline eluent having a pH of 9 or more, more preferably from 9 to 13. Furthermore, this column is useful for the case where the column is used in combination with a hydroxide-type eluent containing hydroxide ion as anion.

10021272-121001

[0051]

(D) Method for measuring anions

The method for measuring anions of the present invention can be performed in accordance with conventional suppressor-system ion chromatography.

Even in the case of using a hydroxide-type eluent which must heretofore rely on the gradient method or a method using a high-concentration solution, since an isocratic condition at a constant concentration and an eluent in a low concentration of 20 mM or less can be used, a special measuring apparatus or a special adjustment of concentration can be dispensed with and at the same time, a high voltage needs not be applied to the suppressor, so that the total measuring cost can be reduced.

[0052]

As such, when the column used for suppressor-system ion chromatography is packed with the anion exchanger of the present invention, good separation of main inorganic anions (e.g., phosphate ion, fluoride ion, chloride ion, nitrite ion, bromide ion, nitrate ion, sulfate ion) can be attained by appropriately selecting the concentration of the eluent not only in the case of using a carbonic acid-type eluent or a boric acid-type eluent but also when a hydroxide-type eluent is used.

10021272-121901

10021272-124001

[0053]

The method for measuring anions according to the present invention can satisfactorily separate halogen oxide ions (e.g., bromate ion, chlorite ion, chlorate ion) simultaneously with main anions (e.g., phosphate ion, fluoride ion, chloride ion, nitrite ion, bromide ion, nitrate ion, sulfate ion). More specifically, even when the above-described ions are analyzed at the same time, the separation degree of chlorite ion and bromate ion and the separation degree of chlorate ion and bromide ion both can be 1.5 or more in the measurement. In the case of simultaneously analyzing halogen oxide ion, a suppressor may or may not be used.

[0054]

In the method for measuring anions according to the present invention, the eluent which can be used for the analysis of halogen oxide ions is not particularly limited and, needless to say about a carbonic acid buffer, a hydroxide-type eluent such as potassium hydroxide and sodium hydroxide may be used in the case of suppressor system. In the case of non-suppressor system, an eluent obtained by adjusting an organic acid such as p-hydroxybenzoic acid and phthalic acid to a pH in the region from weak acid to the vicinity of neutral may be used.

10021272-121601

[0055]

Accordingly, the method for measuring anions of the present invention is useful for the analysis of trace components in the environment, such as anions in air, water (e.g., river water, tap water, spa water, limnetic water, drainage) and soil extract solution; the analysis of food and fertilizer; analysis of anions in cosmetic starting materials; the analysis of anions in coating raw materials, coating material or surface treating solution; the analysis of ultrapure water, mixed acid, air, lead frame or wafer in the semiconductor field; the quality control in the pharmaceutical field; and the analysis of circulating water, cooling water or the like at the electric power plant. The method for measuring anions of the present invention is also useful for the analysis of water subjected to an advanced water purification treatment and containing halogen oxide ions as a by-product of the treatment.

[0056]

[Examples]

The present invention is described in greater detail below by referring to the Examples and Comparative Examples. These are mere exemplification and the present invention is by no means limited thereto.

[0057]

(Example 1)

A polyvinyl alcohol-type polymer produced by the following method was used as a substrate resin into which an anion exchange group is introduced. A uniformly mixed solution containing 100 g of vinyl acetate, 180 g of triallyl isocyanurate, 150 g of butyl acetate and 10 g of 2,2-azobisisobutyronitrile, and 1,400 mL of water having dissolved therein a small amount of polyvinyl alcohol and sodium phosphate were charged into a 5 L-volume three-neck flask equipped with a reflux condenser and the resulting mixed solution was stirred for 10 minutes. Subsequently, while stirring under nitrogen stream, polymerization was performed at 60°C for 16 hours to obtain a particulate polymer. This polymer was filtrated, washed, extracted with acetone and then dried.

[0058]

The obtained polymer was charged together with 3 L of an aqueous 1N sodium hydroxide solution (NaOH) into a 5 L-volume three-neck flask equipped with a reflux condenser, a nitrogen inlet tube and a stirrer, and saponified while stirring at 15°C for 20 hours under nitrogen stream. The resulting polymer was filtered, washed and dried. In the polyvinyl alcohol polymer obtained by the saponification, the density of hydroxyl group was 2.1 meq/g. Using this as

10021270-121001

a substrate, an anion exchanger was manufactured according to the following procedure.

[0059]

Into a 1 L-volume three-neck flask equipped with a nitrogen inlet tube and a stirrer, 100 g of the dry polymer obtained above, 300 g of 1,4-butanediol diglycidyl ether (hereinafter simply referred to as "1,4-BGE"), 300 mL of dimethyl sulfoxide and 65 mL of an aqueous 30 wt% sodium hydroxide solution were charged. The resulting mixture was stirred at 35°C for 12 hours under nitrogen stream to introduce a glycidyl group-containing group into the polymer substrate. After the introduction, the polymer was washed with dimethyl sulfoxide and water and then dried by a vacuum dryer. The mass of the dried polymer was 110 g, thus, the increment from the original substrate was 10%.

[0060]

Into a 1 L-volume three-neck flask equipped with a nitrogen inlet tube and a stirrer, 100 g of the polymer having introduced thereinto a glycidyl group-containing group, 4 g of 1-methylpiperidine and 500 mL of water were charged. The resulting solution was stirred at 40°C for 1 hour to introduce a tertiary heterocyclic amine, thereby manufacturing an anion exchanger. This anion exchanger was washed with 1N hydrochloric acid and an aqueous 1N sodium hydroxide solution while allowing an intervention of water

washing. Thereafter, the anion exchanger was immersed in an aqueous 1N sodium hydroxide solution and treated at 60°C for 5 hours, followed by water washing and drying. The thus-obtained anion exchanger had an average particle size of 5 μ m and an ion exchange capacity of about 20 μ eq/g.

[0061]

The anion exchanger obtained above was packed into a polyether ether ketone resin (PEEK)-made column having an inside diameter of 4.0 mm and a length of 250 mm to prepare an anion exchange column. Using DX-320 (manufactured by Dionex Corporation) equipped with a suppressor as the ion chromatograph, 25 μ l of an aqueous solution containing 2 mg/L of F^- , 3 mg/L of Cl^- , 5 mg/L of NO_2^- , 10 mg/L of Br^- , 10 mg/L of NO_3^- , 15 mg/L of SO_4^{2-} and 15 mg/L of PO_4^{3-} was injected as a standard solution into the ion chromatograph while flowing an aqueous 15 mM sodium hydroxide solution as the eluent at 1.0 ml/min at a column temperature of 35°C. Fig. 2 shows the chromatogram obtained.

[0062]

Example 2:

Into the polyvinyl alcohol-type substrate resin prepared as a substrate in Example 1, 1,4-BGE was introduced according to the same formulation as in Example 1.

Into a 1 L-volume three-neck flask equipped with a

10021272-121901

nitrogen inlet tube and a stirrer, 100 g of the polymer having introduced thereinto a glycidyl group-containing group, 1 g of 1-methylpyrrolidine and 500 mL of water were charged. The resulting solution was stirred at 40°C for 1 hour to introduce a tertiary heterocyclic amine, thereby manufacturing an anion exchanger. This anion exchanger was washed with 1N hydrochloric acid and an aqueous 1N sodium hydroxide solution while allowing an intervention of water washing. Thereafter, the anion exchanger was immersed in an aqueous 1N sodium hydroxide solution and treated at 60°C for 5 hours, followed by water washing and drying. The thus-obtained anion exchanger had an average particle size of 5 μ m and an ion exchange capacity of about 20 μ eq/g.

The anion exchanger obtained above was packed into the same column as in Example 1 and measured in the same manner as in Example 1.

[0063]

Example 3:

Into the polyvinyl alcohol-type substrate resin prepared as a substrate in Example 1, 1,4-BGE was introduced according to the same formulation as in Example 1.

Into a 1 L-volume three-neck flask equipped with a nitrogen inlet tube and a stirrer, 100 g of the polymer having introduced thereinto a glycidyl group-containing

group, 10 g of pyridine and 500 mL of water were charged. The resulting solution was stirred at 40°C for 1 hour to introduce a tertiary heterocyclic amine, thereby manufacturing an anion exchanger. This anion exchanger was washed with 1N hydrochloric acid and an aqueous 1N sodium hydroxide solution while allowing an intervention of water washing. Thereafter, the anion exchanger was immersed in an aqueous 1N sodium hydroxide solution and treated at 60°C for 5 hours, followed by water washing and drying. The thus-obtained anion exchanger had an average particle size of 5 μ m and an ion exchange capacity of about 20 μ eq/g.

The anion exchanger obtained above was packed into the same column as in Example 1 and measured in the same manner as in Example 1.

[0064]

Comparative Example 1:

Into the polyvinyl alcohol-type substrate resin prepared as a substrate in Example 1, 1,4-BGE was introduced according to the same formulation as in Example 1.

Into a 1 L-volume three-neck flask equipped with a nitrogen inlet tube and a stirrer, 100 g of the polymer having introduced therein a glycidyl group-containing group, 75 mL of a 1% aqueous trimethylamine solution and 500 mL of water were charged. The resulting solution was

100-107-1001

stirred at 40°C for 1 hour to introduce an aliphatic tertiary amine, thereby manufacturing an anion exchanger. This anion exchanger was washed with 1N hydrochloric acid and an aqueous 1N sodium hydroxide solution while allowing an intervention of water washing. Thereafter, the anion exchanger was immersed in an aqueous 1N sodium hydroxide solution and treated at 60°C for 5 hours, followed by water washing and drying. The thus-obtained anion exchanger had an average particle size of 5 μm and an ion exchange capacity of about 20 $\mu\text{eq/g}$.

The anion exchanger obtained above was packed into the same column as in Example 1 and measured in the same manner as in Example 1.

[0065]

Comparative Example 2:

Into the polyvinyl alcohol-type substrate resin prepared as a substrate in Example 1, 1,4-BGE was introduced according to the same formulation as in Example 1.

Into a 1 L-volume three-neck flask equipped with a nitrogen inlet tube and a stirrer, 100 g of the polymer having introduced therein a glycidyl group-containing group, 150 mL of a 1% aqueous triethylamine solution and 500 mL of water were charged. The resulting solution was stirred at 40°C for 1 hour to introduce an aliphatic

tertiary amine, thereby manufacturing an anion exchanger. This anion exchanger was washed with 1N hydrochloric acid and an aqueous 1N sodium hydroxide solution while allowing an intervention of water washing. Thereafter, the anion exchanger was immersed in an aqueous 1N sodium hydroxide solution and treated at 60°C for 5 hours, followed by water washing and drying. The thus-obtained anion exchanger had an average particle size of 5 μm and an ion exchange capacity of about 20 $\mu\text{eq/g}$.

The anion exchanger obtained above was packed into the same column as in Example 1 and measured in the same manner as in Example 1.

[0066]

Example 4:

A styrene/divinylbenzene-type resin produced by the following method was used as a substrate resin into which an ion exchange group is introduced. A uniformly mixed solution containing 105 g of 4-acetoxystyrene, 70 g of m-divinylbenzene, 75 g of toluene and 3.5 g of 2,2-azobisisobutyronitrile were suspended in 1,250 mL of water having dissolved therein 10% polyvinyl alcohol and homogenized. Subsequently, the homogenized solution was transferred to a 2 L-volume separable flask and polymerized at 70°C for 6 hours to obtain a particulate polymer. This polymer was filtrated, washed with water and acetone, air-

dried and then classified by air separation to obtain particles of 3 to 6 μm .

In 1,500 mL of methanol, 150 g of the dry polymer obtained above was suspended, a solution obtained by dissolving 150 g of KOH in 1,500 mL of a 50% methanol solution was added thereto, and the polymer solution was stirred and thereby saponified at 50°C for 6 hours. The resulting polymer was washed with water and acetone and then dried to recover 135 g of the polymer.

[0067]

Into a 2 L-volume three-neck flask equipped with a nitrogen inlet tube and a stirrer, 100 g of the dry polymer obtained above, 400 g of 1,4-BGE, 300 mL of dimethyl sulfoxide and 65 mL of water were charged. The resulting mixture was stirred at 35°C for 16 hours under nitrogen stream to introduce a glycidyl group-containing group into the polymer substrate. After the introduction, the polymer was washed with dimethyl sulfoxide and water, and then dried by a vacuum dryer. The mass of the dried polymer was 105 g, thus, the increment from the original substrate was 5%.

[0068]

Into a 1 L-volume three-neck flask equipped with a nitrogen inlet tube and a stirrer, 100 g of the polymer having introduced thereinto a glycidyl group-containing

group, 8 g of 1-methylpiperidine and 500 mL of water were charged. The resulting solution was stirred at 40°C for 4 hours to introduce a tertiary heterocyclic amine, thereby manufacturing an anion exchanger. This anion exchanger was washed according to the same formulation as in Example 1 to obtain an anion exchanger.

The anion exchanger obtained above was packed into the same column as in Example 1 and measured in the same manner as in Example 1.

[0069]

Comparative Example 3:

Using a column (a pellicular-type ion exchanger having introduced therein a tertiary alkanolamine) commercially available at present as a column for a hydroxide-type eluent, the measurement was performed in the same manner as in Example 1.

[0070]

Evaluation:

As for Examples 1 to 4 and Comparative Examples 1 to 3, the kind of tertiary amine introduced, the difference in the retention time between the fluoride ion and the water dip, the separation degree of chloride ion and nitrite ion, and the retention time of phosphate ion are shown in Table 1. The difference in the retention time between fluoride ion and water dip was determined by using respective peaks

as the retention time. The separation degree R of chloride ion and nitrite ion was determined according to the following formula:

[0071]

[Eq. 3]

$$R=2 \times (t_2 - t_1) / (w_1 + w_2)$$

wherein t_1 and t_2 represent respective retention times and w_1 and w_2 represent respective peak widths.

[0072]

[Table 1]

	Tertiary Amine Introduced	Difference in Retention Time between Fluoride Ion and Water Dip (min)	Separation Degree of Chloride Ion and Nitrite Ion (R)	Retention Time of Phosphate Ion (min)
Example 1	1-methyl- piperidine	1.00	5.2	15.6
Example 2	1-methyl- pyrrolidine	0.95	5.0	15.2
Example 3	pyridine	0.90	5.0	15.8
Example 4	1-methyl- piperidine	0.85	5.5	19.6
Comparative Example 1	alkanolamine	immeasurable due to overlapping of peaks	1.8	34.0
Comparative Example 2	trimethyl- amine	0.79	3.4	16.0
Comparative Example 3	triethyl- amine	0.68	3.2	14.1

[0073]

In the case of the column used in Comparative Example

1-
CO
2-
3-
4-
5-
6-
7-
8-
9-
10-
11-
12-
13-
14-
15-
16-
17-
18-
19-
20-
21-
22-
23-
24-
25-
26-
27-
28-
29-
30-
31-
32-
33-
34-
35-
36-
37-
38-
39-
40-
41-
42-
43-
44-
45-
46-
47-
48-
49-
50-
51-
52-
53-
54-
55-
56-
57-
58-
59-
60-
61-
62-
63-
64-
65-
66-
67-
68-
69-
70-
71-
72-
73-
74-
75-
76-
77-
78-
79-
80-
81-
82-
83-
84-
85-
86-
87-
88-
89-
90-
91-
92-
93-
94-
95-
96-
97-
98-
99-
100-

1, which is commercially available at present, the retention time of phosphate ion is extremely redundant and 30 minutes or more, nevertheless, the fluoride ion is partially overlapped with water dip and moreover, the separation of chloride ion and sulfite ion is not satisfied. On the other hand, in the case of the column for suppressor-system ion chromatography using the anion exchanger manufactured in Examples 1, 2 and 3 by introducing a tertiary heterocyclic amine according to the present invention, even when the retention time of phosphate ion which is difficult to elute is set to 14 to 16 minutes, the fluoride ion can be satisfactorily separated from water dip and at the same time, the separation of chloride ion and nitrite ion can be satisfactorily attained. This reveals significant improvement as compared with anion exchangers of Comparative Examples 2 and 3 where an acyclic tertiary amine was introduced. Furthermore, as seen from Example 4, the substrate resin is not limited to the polyvinyl alcohol-type resin but the introduction of a heterocyclic amine is effective also for other resins.

[0074]

Example 5:

A polyvinyl alcohol-type polymer produced by the following method was used as a substrate resin into which

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	

[illegible]

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	

[illegible]

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	

nitrogen inlet tube and a stirrer, 100 g of the dry polymer obtained above, 300 g of 1,4-BGE, 300 mL of dimethyl sulfoxide and 65 mL of an aqueous 30 wt% sodium hydroxide were charged. The resulting mixture was stirred at 35°C for 12 hours under nitrogen stream to introduce a glycidyl group-containing group into the polymer substrate. After the introduction, the polymer was washed with dimethyl sulfoxide and water, and then dried by a vacuum dryer. The mass of the dried polymer was 110 g, thus, the increment from the original substrate was 10%.

[0077]

Into a 1 L-volume three-neck flask equipped with a nitrogen inlet tube and a stirrer, 100 g of the polymer having introduced therein a glycidyl group-containing group, 5 g of 1-methylpiperidine and 500 mL of water were charged. The resulting solution was stirred at 40°C for 2 hours to introduce a tertiary heterocyclic amine, thereby manufacturing an anion exchanger. This anion exchanger was washed with 1N hydrochloric acid and an aqueous 1N sodium hydroxide solution while allowing an intervention of water washing. Thereafter, the anion exchanger was immersed in an aqueous 1N sodium hydroxide solution and treated at 100°C for 20 hours, followed by water washing and drying. The thus-obtained anion exchanger had an average particle size of 5 μ m and an ion exchange capacity of about 30 μ eq/g.

[0078]

The anion exchanger obtained above was packed into a polyether ether ketone resin (PEEK)-made column having an inside diameter of 4.0 mm and a length of 250 mm to prepare an anion exchange column. Using 761 Compact IC (manufactured by Metrohm Ltd.) equipped with a suppressor as the ion chromatograph, 20 μ l of an aqueous solution containing 2 mg/L of F^- , 10 mg/L of ClO_2^- , 10 mg/L of BrO_3^- , 3 mg/L of Cl^- , 5 mg/L of NO_2^- , 10 mg/L of ClO_3^- , 10 mg/L of Br^- , 10 mg/L of NO_3^- , 15 mg/L of SO_4^{2-} and 15 mg/L of PO_4^{3-} was injected as a standard solution into the ion chromatograph while flowing an aqueous 3 mM sodium carbonate solution as the eluent at 0.7 ml/min at a column temperature of 25°C. Fig. 3 shows the chromatogram obtained.

[0079]

Example 6:

Into the polyvinyl alcohol-type substrate resin prepared as a substrate in Example 1, 1,4-BGE was introduced according to the same formulation as in Example 1.

Into a 1 L-volume three-neck flask equipped with a nitrogen inlet tube and a stirrer, 100 g of the polymer having introduced therein a glycidyl group-containing group, 1.5 g of 1-methylpyrrolidine and 500 mL of water were charged. The resulting solution was stirred at 40°C

for 2 hour to introduce a tertiary heterocyclic amine, thereby manufacturing an anion exchanger. This anion exchanger was washed with 1N hydrochloric acid and an aqueous 1N sodium hydroxide solution while allowing an intervention of water washing. Thereafter, the anion exchanger was immersed in an aqueous 1N sodium hydroxide solution and treated at 100°C for 20 hours, followed by water washing and drying. The thus-obtained anion exchanger had an average particle size of 5 μ m and an ion exchange capacity of about 30 μ eq/g.

The anion exchanger obtained above was packed into the same column as in Example 5 and measured in the same manner as in Example 1.

[0080]

Comparative Examples 4:

Into the polyvinyl alcohol-type substrate resin prepared as a substrate in Example 1, 1,4-BGE was introduced according to the same formulation as in Example 1.

Into a 1 L-volume three-neck flask equipped with a nitrogen inlet tube and a stirrer, 100 g of the polymer having introduced therein a glycidyl group-containing group, 100 mL of a 1% aqueous trimethylamine solution and 500 mL of water were charged. The resulting solution was stirred at 40°C for 2 hour to introduce an aliphatic

14
13
12
11
10
9
8
7
6
5
4
3
2
1

tertiary amine, thereby manufacturing an anion exchanger. This anion exchanger was washed with 1N hydrochloric acid and an aqueous 1N sodium hydroxide solution while allowing an intervention of water washing. Thereafter, the anion exchanger was immersed in an aqueous 1N sodium hydroxide solution and treated at 100°C for 20 hours, followed by water washing and drying. The thus-obtained anion exchanger had an average particle size of 5 μm and an ion exchange capacity of about 30 $\mu\text{eq/g}$.

The anion exchanger obtained above was packed into the same column as in Example 5 and measured in the same manner as in Example 1.

[0081]

Evaluation:

As for Examples 5 and 6 and Comparative Example 4, the kind of tertiary amine introduced, the separation degree of chlorite ion and bromate ion, the separation degree of chlorate ion and bromide ion, and the retention time of sulfate ion are shown in Table 2. The retention time of sulfate ion is shown to verify that three columns can be properly evaluated by agreeing the elution position of sulfate ion which is largest in the retention time. The degree R was determined according to the following formula:

[0082]

[Eq. 4]

$$R=2 \times (t_2 - t_1) / (w_1 + w_2)$$

wherein w_1 and w_2 represent respective peak widths, and t_1 and t_2 represent respective retention times.

The separation degree R is preferably 1.5 or more.

[0083]

[Table 2]

	Tertiary Amine Introduced	Separation Degree of Chlorite Ion and Bromate Ion (min)	Separation Degree of Chlorate Ion and Bromide Ion (R)	Retention Time of Sulfate Ion (min)
Example 5	1-methyl- piperidine	1.72	2.11	25.2
Example 6	1-methyl- pyrrolidine	1.74	1.55	25.5
Comparative Example 4	trimethyl- amine	1.58	0.80	25.8

[0084]

In the case of the conventional column for suppressor-system ion chromatography prepared in Comparative Example 4 where an anion exchanger manufactured by introducing a tertiary alkyl amine is used, the separation degree of chlorate ion and bromide ion was insufficiently 1.5 or less, whereas in the case of the column for suppressor-system ion chromatography according to the present invention prepared in Examples 5 and 6 where an anion exchanger manufactured by introducing a tertiary heterocyclic amine is used, the

separation degree of chlorite ion and bromate ion and the separation degree of chlorate ion and bromide ion both are 1.5 or more and from this, it is understood that satisfactory separation can be attained. This reveals a significant improvement as compared with the anion exchanger manufactured by introducing an acyclic tertiary alkylamine in Comparative Example 4.

[0085]

Fig. 3 shows a chromatogram of the analysis using the column produced in Example 5. It is seen that the fluoride ion can be satisfactorily separated from the water dip (a negative peak generated due to water in the sample), the carbonic acid dip can be separated from other ion peaks, and excellent properties of the porous chemical bond-type anion exchanger derived from a polyvinyl alcohol-type substrate can be reflected.

In this Example, a carbonic acid buffer was used as the eluent but the eluent which can be used for the analysis of halogen oxide ion is not limited thereto.

[0086]

[Effects of the Invention]

The column for suppressor-system ion chromatography packed with the anion exchanger of the present invention can reduce the elution time of phosphate ion to 20 minutes or less under an isocratic condition using a hydroxide-type

eluent having a low concentration of 20 mM or less, can satisfactorily separate the fluoride ion which is difficult to hold, from a water dip and can satisfactorily separate chloride ion and nitrite ion, so that in the analysis using the above-described eluent, the measuring time can be shortened and the life of continuous regeneration-type ion exchange membrane suppressor can be prolonged.

[0087]

The column for ion chromatography packed with the anion exchanger of the present invention can analyze the halogen oxide ions such as bromate ion, chlorite ion and chlorate ion, simultaneously with seven kinds of standard inorganic anions.

Accordingly, the present invention is useful in the field over a wide range, such as environment, food, agriculture, cosmetics, coating material, semiconductor, medical preparation and electric power. The present invention is particularly useful for the analysis of several ppb of nitrite ion in the presence of a dozen of ppm of chloride ion in tap water or the like or for the analysis of water containing halogen oxide ion generated as a by-product, for example, water subjected to advanced water purification.

10021272-121001

[0088]

[BRIEF DESCRIPTION OF THE DRAWINGS]

[Fig. 1]

Fig. 1 is a schematic view showing a fundamental structure of ion chromatography.

[Fig. 2]

Fig. 2 shows a chromatogram sampled by injecting a test aqueous solution containing seven kinds of standard ions into a separation column prepared by packing the ion exchanger of the present invention obtained in Example 1.

[Fig. 3]

Fig. 3 shows a chromatogram when halogen oxide ion is analyzed simultaneously with seven kinds of inorganic anions by the measuring method of the present invention, obtained in Example 5.

[0089]

[Description of Numerical References]

- 1 peak of fluoride ion
- 2 peak of chlorite ion
- 3 peak of bromate ion
- 4 peak of chloride ion
- 5 peak of nitrite ion
- 6 peak of chlorate ion
- 7 peak of bromide ion
- 8 peak of nitrate ion

- 9 peak of phosphate ion
- 10 peak of sulfate ion

10021272.121901

This application is based on Japanese Patent Application Nos. P2000-386002 and P2001-133064 filed December 19, 2000 and April 27, 2001, respectively, the disclosures of which are incorporated herein by reference in their entirety.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232

What is claimed is:

1. A porous polymer particle comprising an alkali-resistant polymer substrate having bonded thereto through a spacer a nitrogen-containing heterocyclic group containing a quaternary ammonium structure.

10021272-124901

ABSTRACT

A porous polymer particle includes an alkali-resistant polymer substrate having bonded thereto through a spacer a nitrogen-containing heterocyclic group containing a quaternary ammonium structure.

10021272 121901